


65 4K

GOOGLE TV

GSQ4K65S-GT

LED TV SPECIFICATION

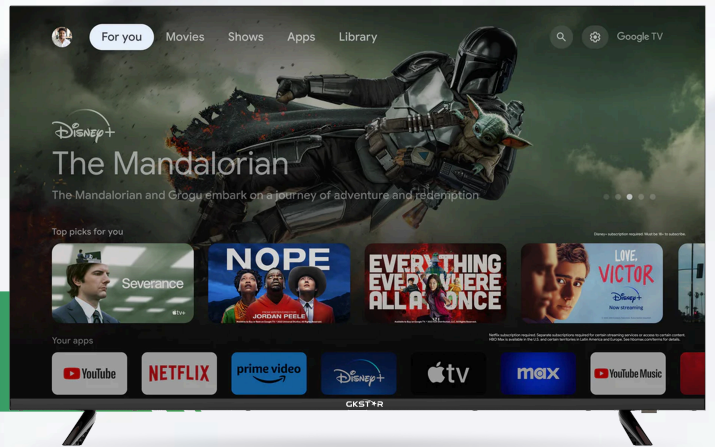

Android Features

| | |
|----------------------------------|--------------------------------|
| Chipset | Realtek with Google TV 3.0 ver |
| Solution(OS) | Android 11.0 |
| CPU | ARM Cortex-A53 Quad-Cor/1.5GHz |
| GPU | 2.4 GHz/5.8GHz |
| ROM/eMMC | 8GB |
| ROM/DDR | 1.5GB |
| Google play store support for TV | Yes |

Features

| | |
|----------------------------------|-------------------------|
| Screen Size | 165 Cm |
| Open Cell | LG |
| BLU Power | 100W |
| Contrast Ratio | 2,00,000:1 |
| Brightness | > 350 nits |
| Viewing Angle | 178° H/178°V |
| Response Time | 8 ms |
| Main Board | 3in1 Board |
| Speaker | 8E/10W Box SPK |
| Preload Apps | Yes |
| HDR 10 Support | Yes |
| Screen cast | Yes |
| Bluetooth | Yes |
| Google voice assistance function | Yes |
| Google user login for TV | Yes |
| OSD Language | English, Hindi optional |

I/O Ports Qty

| | | |
|---------------------|-----|------------------|
| RF | Yes | 75 ohms |
| AV IN | 1 | 3.5mm jack |
| USB | 2 | V-2.0 |
| HDMI | 3 | Standard |
| LAN | 1 | RJ-45 |
| Wi-Fi | Yes | 2.4 GHz & 5.8GHz |
| Optical - out | Yes | RCA |
| Audio out/Ear Phone | 1 | Mini (3.5mm) |

Video Input - CVBS

| | |
|--------------|------------------|
| Color System | PAL, SECAM |
| Video | 1Vp-p@75 Ohm ±5% |
| Audio | 500mV RMS |

Video Input - PC-RGB(N/A)

| | |
|------------|-----------------------|
| Sync | H:30-75KHz, V:56-75Hz |
| Video | 0.7Vp-p @ 75ohm |
| Resolution | Up to 1920*1080@60Hz |

Video Input - HDMI

| | |
|------------|--|
| Video | Standard TDMS format |
| Resolution | 480i, 480p, 576i, 576p, 720p, 1080i, 1080p |

| MEDIA | FILE | VIDEO | AUDIO |
|---------------------------------|-------------|--------------------------------|------------------------|
| Movie | .avi | MJPEG | MP3,AAC, MP2,PCM |
| | .mp4 | MPEG-2, MPEG-4, H.264 | |
| | .ts/tr | MPEG-2, H.264 | |
| | .mkv/.mov | MPEG-2, H.265 | |
| | .mpg | MPEG-2, H.264 | |
| | .dat | MPEG-1 | MP2 |
| | .vob | MPEG-2 | COOK |
| | .rm/.rmvb | RV8, RV9, RV10 | |
| Music | .mp3 | - | MP3 |
| | .m4a/.aac | - | AAC |
| Photo | .jpg/ .jpeg | Progressive JPEG | Max Reso... 1024*768 |
| | | Baseline JPEG | Max Reso... 15360*6400 |
| | .bmp | | Max Reso... 9600*6400 |
| | .png | Non-Interlaced | Max Reso... 9600*6400 |
| Interlaced | | Max Reso... 1200*800 | |
| Text | .txt | ANSI/UNICODE GB/UTF8 | File Size: 1MB max |
| INPUT ELECTRICAL SPECIFICATIONS | | | |
| Voltage | | 100~240V AC | |
| Current | | <0.8A max | |
| Frequency | | 50Hz/60Hz ±5% | |
| Inrush Current(Cold start) | | 70A type peak,230V ac | |
| Efficiency (full load) | | 80%(full load with 230Vac) | |
| Leakage Current | | <0.5mA, 230Vac input | |
| Standby Power Loss | | ≤0.5W 230Vac input and no load | |
| Input Fuse | | T5 AL/250Vac | |
| Max Power Consumption | | 160W max (o/p) | |
| WEIGHT & SIZE SPECIFICATIONS | | | |
| Net Weight | | 14.9 Kgs (Approx.) | |
| Gross Weight | | 20.0 Kgs (Approx.) | |
| Net Dimension(mm) | | 1445 x 833 x 89 | |
| Gross Dimension(mm) | | 1588 x 152 x 938 | |

